

Node Voltages Vbatt = 4.2 (By Measure)
 BATT 4.2
 A2 0.87
 A3 0.20
 A4 2.36
 A6 2.11
 A7 2.11
 A8 2.11
 A9 2.11


Supply Current
 No Input Ibat = 5-15mA typ
 Full 2W power Ibat >400mA

Resistances (Power OFF)
 To GND:
 Probe-In = 5K
 Batt = 2.2K
 A1 0-5K
 A2 = 17K
 A3 = 100
 A4 = 3.2K

T1/T2 diode mode:
 EB Fwd = 0.66 Rev = open
 BC Fwd = 0.66 Rev = open

Pin
 1 SLEEVE GROUND
 2 TIP AUDIO OUT
 3 OUTER RING1 PROBE POWER
 4 INNER RING2 POP LED D1 POWER

Kit Options:
 MK0 - PCBs Only
 MK1 - All components except J1, J2, SW1, D1, LS1
 MK2 - All components except LS1

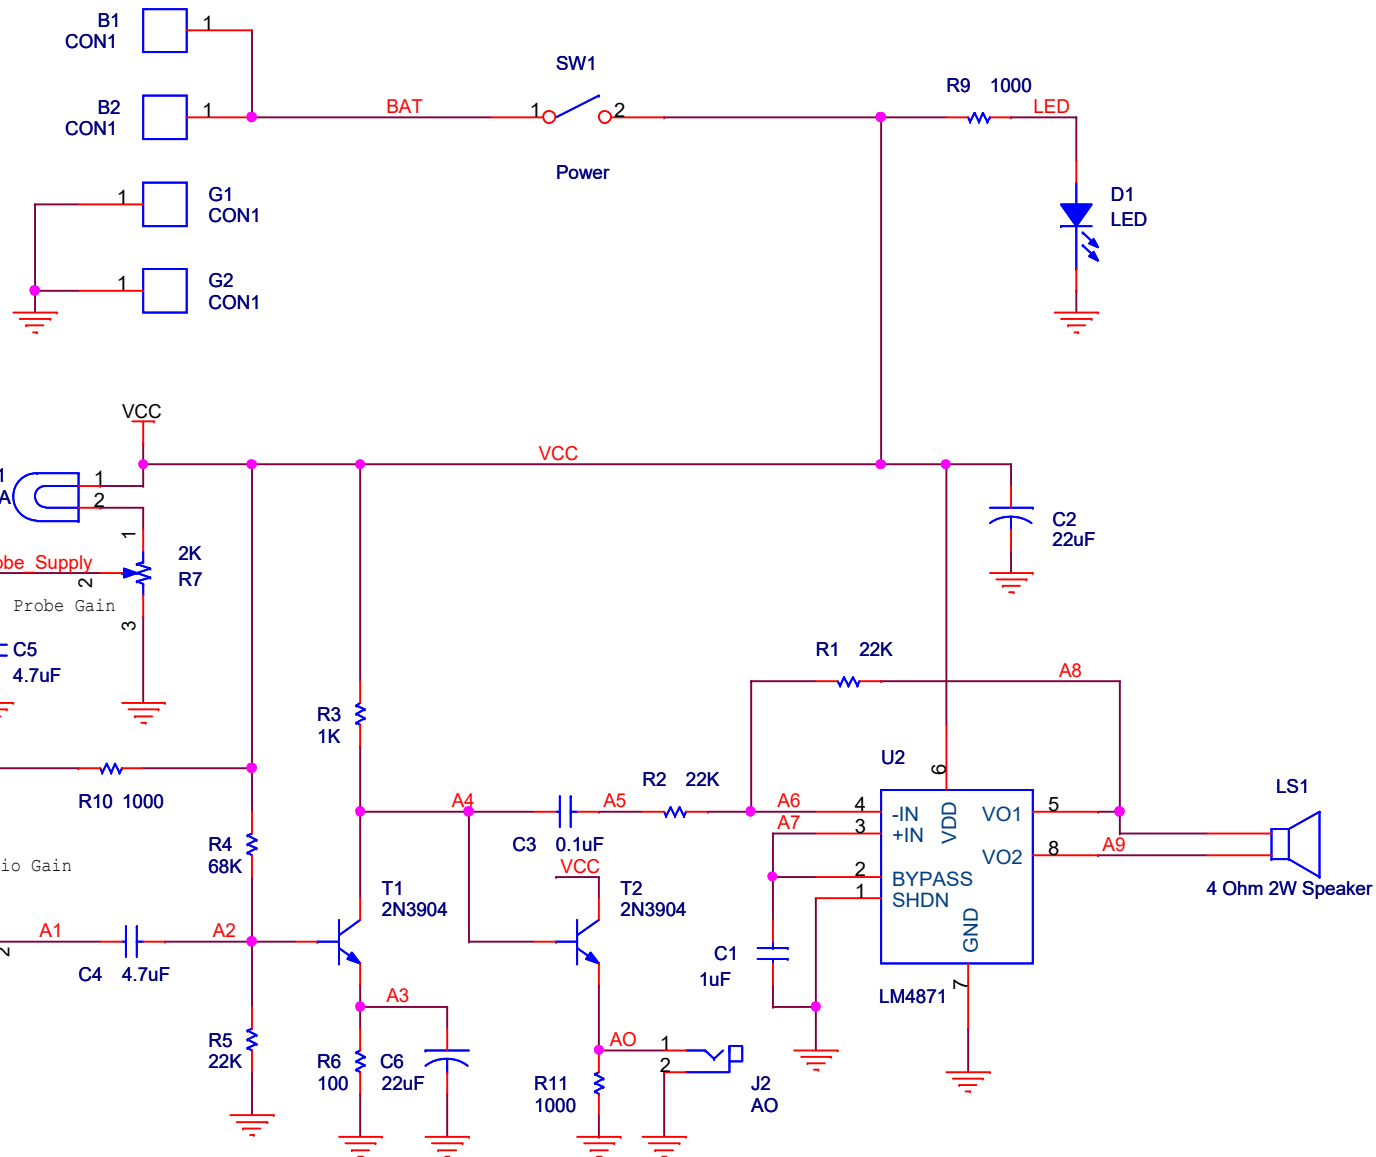

Title		
HWC SuperProbe2 Amp		
Size	Document Number	Rev
A	<Doc>	4.4
Date:	Thursday, December 18, 2025	Sheet 1 of 1